






CLOSET LIGHTING OPTIONS



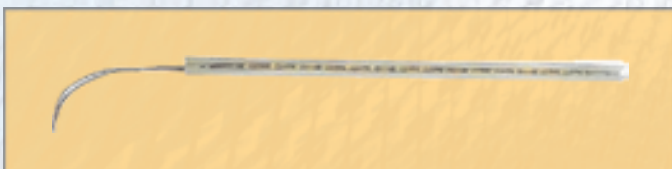

LED STRIP LIGHTING

WFLX-12 Series

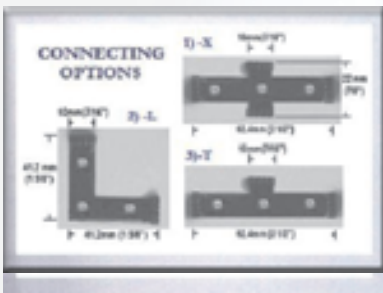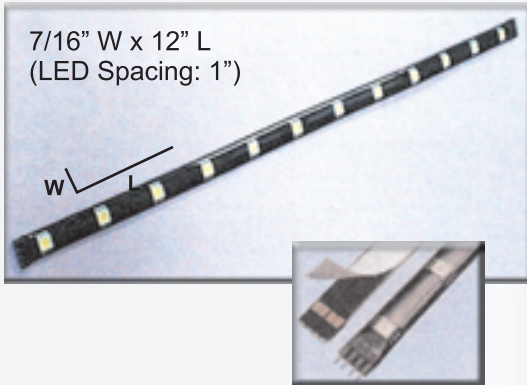


- » 12" strips – Linkable – Can be cut after each set of 3 LED's
 - » Peel & Stick or Mounting Bracket
 - » Extremely low profile, lightweight and durable
 - » Low Power consumption: 12V-AC power supply
 - » Warm, Cool or RGB (controller with remote)
- » Transformers: Basic 4 strips, High performance (up to 16 strips)

KWFLX12 – Kit (1 strip, mounting brackets, Transformer, connectors)
 KWFLX12-AO (add on strip)
 WHC = Cool, WHW = Warm
 KWFLX12-RGB (color kit)
 KWFLX12-RGB-CTR (remote for color)
 KWFLX12-AO-RGB (add on strip color)

ALL-12 Series

- » 12" strips – Linkable
 - » Mounting Bracket: 2 Types
 - » Low profile, lightweight and durable
 - » Low Power consumption: 12V-AC power supply
 - » Warm, Cool or RGB (controller with remote)
- » Transformers: Basic 4 strips, High performance (up to 16 strips)

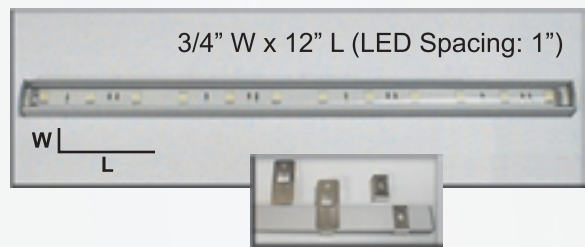

KALL12 – Kit (1 strip, mounting brackets, Transformer, connectors)
 KALL12-AO (add on strip cool)
 WHC = Cool, WHW = Warm
 KALL12-RGB (color kit)
 KALL12-RGB-CTR (remote for color)
 KALL12-AO-RGB (add on strip color)



LED RECESSED LIGHT KITS

L2R Series



- ▶▶ Single, Double or Triple Kits
- ▶▶ Pivoting
- ▶▶ Low Voltage – 12V DC
- ▶▶ 3 1/4" Cut-out, 3 1/2" with trim, 1 3/8" Depth
- ▶▶ Chrome or Brushed Satin Nickel finish
- ▶▶ Linkable: 12", 24", 36", 48", 60"

KLEDL2R: Kit (lights, Transformer with protection,
10' power supply, connectors)
WC = Cool, WW = Warm
Lights: -1 (single), -2 (double), -3 (triple)

Mini LED Series

- ▶▶ Kits of up to 10 (per transformer)
- ▶▶ Low Voltage – 12V DC
- ▶▶ 2 1/4" Cut-out, 2 7/8" with trim, 3/4" Depth
- ▶▶ Finishes: Chrome, Brushed Satin Nickel,
Black, Brass, White
- ▶▶ 18" Connectors
- ▶▶ Transformer: 5" W x 1 3/4" D x 2 3/4" H




KLEDOR9: Kit (lights, Transformer with protection,
10' power supply, connectors)
WC = Cool, WW = Warm
Lights: -1 (single), -2 (double), -3 (triple), ...
Finishes: CH, SN, BL, BS, WH



LED LIGHTING ACCESSORIES


CB01 :: LED Closet Light

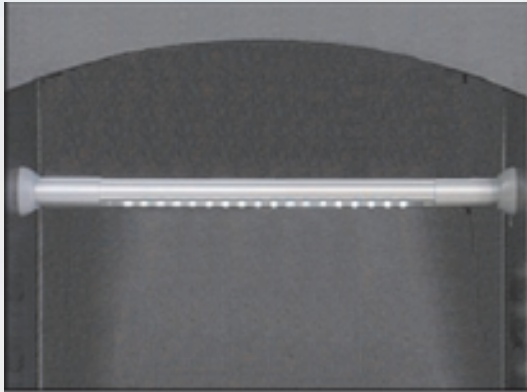

- » Up to 100 lb weight capacity
- » Standard widths: 2', 3' and 4'. Can be cut to size
- » Low Voltage – 12V DC
- » Each unit has adjustment feature re width: 1" to 8"
- » Satin Chrome finish
- » Special hidden locking bolt for theft prevention

LED-B01-24-SC:	2'
LED-B01-36-SC	3'
LED-B01-48-SC	4'
Kit includes:	Bar light, Mounting Bracket, Transformer, 10' power supply

GLSTR :: LED Strip for Glass Shelves

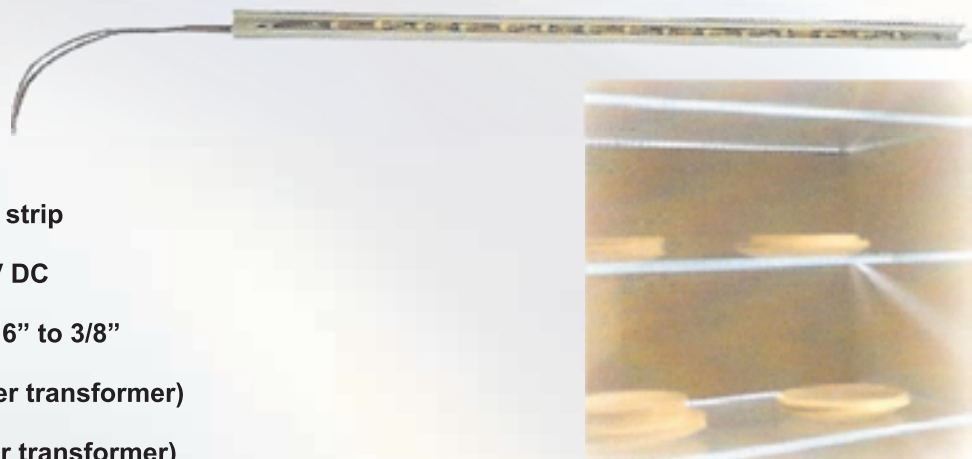

- » Ultra thin LED light strip
- » Low Voltage – 12V DC
- » For glass thickness: 3/16" to 3/8"
- » 21 LED strip (maximum 10 per transformer)
- » 30 LED strip (maximum 7 per transformer)

SHGLSTRK-21: Kit	16 1/2"
SHGLSTRK-30: Kit	22 1/4"
Kit includes:	Single strip, connectors, Transformer, 10' power supply
SHGLSTR-21: Strip only	16 1/2"
SHGLSTR-30: Strip only	22 1/4"



FLUORESCENT LIGHTING

T5 Series



- ▶▶ Linkable up to 10 units
- ▶▶ AC: 120V, 60Hz, 12 Amp
- ▶▶ Total Height 1 5/8"
- ▶▶ Finishes: White or Black
- ▶▶ 10' Power cord

919F series

Lengths: 13 1/2" (8W), 22 1/2" (13W), 35 5/8" (21W), 47 1/2" (28W)

C = Cool, W = Warm

Finishes: White (WH), Black (NR)

Links: 6", 1', 2', 3', 4'

T4 Super Slim Fixture



- ▶▶ Linkable from 10 units (8W) to 6 units (35W)

- ▶▶ AC: 120V, 60Hz, 12 Amp

- ▶▶ Total Height 1 3/8"

- ▶▶ Finish: White

- ▶▶ 10' Power cord



916F series

Lengths: 13 1/2" (8W), 17 1/2" (12W), 19 1/4" (16W), 21" (20W),
29" (22W), 34 1/2" (24W), 46 1/4" (28W), 58" (35W)

C = Cool



Finishes: White (WH)

Links: 6", 1', 2', 3', 4'




SPECIAL OPTIONS

DEC Decora

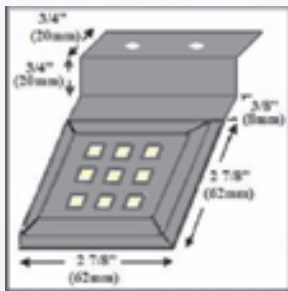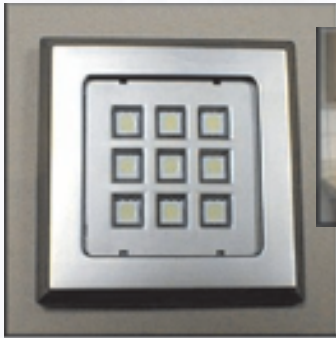

KLED9SQ: Peel & Stick (2 7/8" x 2 7/8")
 KLEDDDL: Mounting Bracket (4" x 2 7/8")
 WC = Cool, WW = Warm
 Finishes: CH, BSN
 Kit includes: Single unit, connectors, Transformer, 10' power supply

- » Decorative discreet design
- » Low Voltage – 12V DC
- » Peel & Stick or Mounting Bracket
- » Finishes: Chrome, Brushed Satin Nickel
- » Transformers: Basic 5 units, High performance up to 10



MS-1P Motion Sensor

- » Automatic Light On/Off triggered by motion detection
- » Sensitive to motion Horizontally, Vertically, Diagonally
- » Timer: 10 seconds to 5 minutes (Default 4 minutes)
 - » Standard AC Voltage plug
 - » Detection Distance 20 ft.
 - » White



SHMS-1P Single motion detector



POWER HARNESS SYSTEMS

918QM-022 (Entertainment Unit)



- ▶▶ 3 Outlets with Safety tabs
- ▶▶ Coaxial Cable (TV), Cable Box
- ▶▶ AC: 120V, 60Hz, 12 Amp
- ▶▶ 10' Power cord
- ▶▶ 6 1/4" L x 2 1/8" W x 1 1/8" D

918PB-CPH2C/4USB (Computer Station)

- ▶▶ Combo switch / Circuit breaker
- ▶▶ USB Hub
- ▶▶ RJ11 cable (telephone – 8')
- ▶▶ RJ45 cable (internet – 8')
- ▶▶ 10' Power cord
- ▶▶ 9 7/8" inner L x 3 7/8" inner W



918PB-3T2 (Telephone / Modem)



- ▶▶ Combo switch / Circuit breaker
- ▶▶ Surge Protection
- ▶▶ 3 or 4 Plug receptors
- ④ & ⑤ RJ45 & RJ11 Outlets
- ⑥ RJ11 cable (telephone - 8')
- ① RJ45 cable (internet - 8')
- ② & ③ 10' Power cord
- ▶▶ 8 1/4" L x 1 7/8" W

918PB-3T2:	3 Plug Receptors
918PB-4T2:	4 Plug Receptors



1855 Hymus, Dorval
(Quebec) Canada H9P 1J8
Tel. (800) 363-4979
Fax (514) 685-5920

Quinko-Tek

Northeast



61-23 190 Street, Suite 427
Fresh Meadows, NY 11365

Cell. (917) 836-9653
Fax (718) 228-8512



www.qlineshop.com



www.qlineshop.com



Quinko-Tek

Mid-Atlantic

407 N, Stonestreet Ave.
Rockville, MD 20850

Off. (301) 279-0835
Cell. (301) 404-6952
Fax (301) 637-3527